


# FLEXIBLE LINKS

## STANDARD RATING

WIDTH		SQ		CURRENT THICKNESS			WIDTH		SQ		CURRENT THICKNESS		
mm	inch	mm <sup>2</sup>	in <sup>2</sup>	Amp	mm	inch	mm	inch	mm <sup>2</sup>	in <sup>2</sup>	Amp	mm	inch
40	1.57	50	0.0775	290	5.5	0.22	100	3.94	300	0.4650	1,060	8.6	0.34
		100	0.1550	410	7.1	0.28			400	0.6200	1,240	10.0	0.40
		150	0.2325	520	8.6	0.34			500	0.7750	1,380	11.2	0.44
		200	0.3100	580	10.1	0.40			600	0.9300	1,530	13.0	0.52
		250	0.3875	690	11.7	0.46			800	1.2400	1,800	15.5	0.61
		300	0.4650	770	13.8	0.55			1,000	1.5500	2,000	18.1	0.72
50	1.97	100	0.1550	450	6.4	0.25	120	4.72	1,250	1.8600	2,200	21.4	0.85
		200	0.3100	650	8.9	0.35			1,500	2.3250	2,500	24.7	0.98
		300	0.4650	820	11.3	0.45			500	0.7750	1,500	11.2	0.44
		400	0.6200	970	14.2	0.56			600	0.9300	1,650	12.2	0.48
		500	0.7750	1,100	16.7	0.66			800	1.2400	1,900	14.2	0.56
		600	0.9300	1,220	19.4	0.77			1,000	1.5500	2,100	16.3	0.65
60	2.36	200	0.3100	680	7.9	0.31	150	5.91	1,200	1.8600	2,350	18.4	0.73
		300	0.4650	900	9.9	0.39			1,400	2.1700	2,550	20.8	0.82
		500	0.7750	1,150	14.5	0.57			1,500	2.3250	2,650	22.5	0.89
		600	0.9300	1,300	16.6	0.65			1,600	2.4800	2,800	23.5	0.93
		800	1.2400	1,500	20.8	0.82			600	0.9300	1,800	10.9	0.43
		1,000	1.5500	1,720	25.0	0.98			700	1.0850	2,100	12.5	0.50
75	2.95	300	0.4650	940	8.8	0.34	200	7.87	1,000	1.5500	2,350	14.2	0.56
		500	0.7750	1,240	12.3	0.48			1,200	1.8600	2,600	16.1	0.64
		600	0.9300	1,380	14.2	0.56			1,600	2.4800	3,000	19.9	0.79
		800	1.2400	1,630	17.6	0.70			2,000	3.1000	3,400	23.4	0.93
		1,000	1.5500	1,860	20.5	0.81			2,400	3.7200	3,800	27.3	1.08
		1,200	1.8600	2,070	24.6	0.97			2,800	4.3400	4,100	31.1	1.23
80	3.15	300	0.4650	1,000	8.4	0.33	200	7.87	1,000	1.5500	2,640	12.2	0.48
		400	0.6200	1,170	9.9	0.39			1,200	1.8600	2,900	13.5	0.54
		500	0.7750	1,310	11.7	0.46			1,500	2.3250	3,260	15.5	0.61
		600	0.9300	1,500	13.3	0.53			2,000	3.1000	3,800	18.7	0.74
		800	1.2400	1,720	16.4	0.65			2,500	3.8750	4,200	22.9	0.91
		1,000	1.5500	1,950	19.8	0.78			3,000	4.6500	4,700	27.2	1.07
		1,200	1.8600	2,150	23.2	0.92			3,350	5.1925	5,100	30.6	1.21
		1,250	1.9375	2,190	24.3	0.96			3,500	5.4250	5,250	31.8	1.26

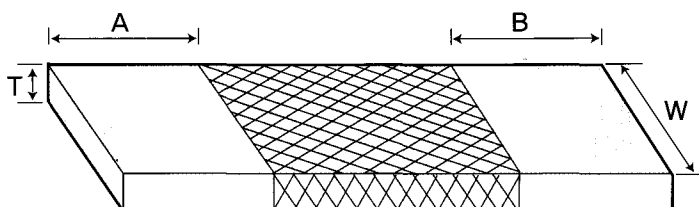

- Permissible Temperature Rising :  
55 °C (Up to 40 °C ambient temperature)

- Products of other specification can be supplied in accordance with contract