




LAMINATED SHUNTS

STANDARD RATING

WIDTH		SQ		THICKNESS		CURRENT (Amp)
mm	inch	mm ²	in ²	mm	inch	
50	1.97	150	0.2325	3	0.12	570
		300	0.4650	6	0.23	830
		400	0.6200	8	0.31	980
		500	0.7750	10	0.39	1,110
		750	1.1625	15	0.58	1,400
75	2.95	450	0.6975	6	0.23	1,200
		600	0.9300	8	0.31	1,400
		750	1.1625	10	0.39	1,580
		1,120	1.7360	15	0.58	1,990
		1,500	2.3250	20	0.78	2,350
100	3.94	600	0.9300	6	0.23	1,560
		800	1.2400	8	0.31	1,800
		1,000	1.5500	10	0.39	2,000
		1,500	2.3250	15	0.58	2,500
		2,000	3.1000	20	0.76	3,000
150	5.91	900	1.3950	6	0.23	2,200
		1,200	1.8600	8	0.31	2,600
		1,500	2.3250	10	0.39	2,900
		2,250	3.4875	15	0.58	3,650
		3,000	4.6500	20	0.76	4,270
200	7.87	1,200	1.8600	6	0.23	2,900
		1,600	2.4800	8	0.31	3,400
		2,000	3.1000	10	0.39	3,800
		3,000	4.6500	15	0.58	4,700
		4,000	6.2000	20	0.78	5,500

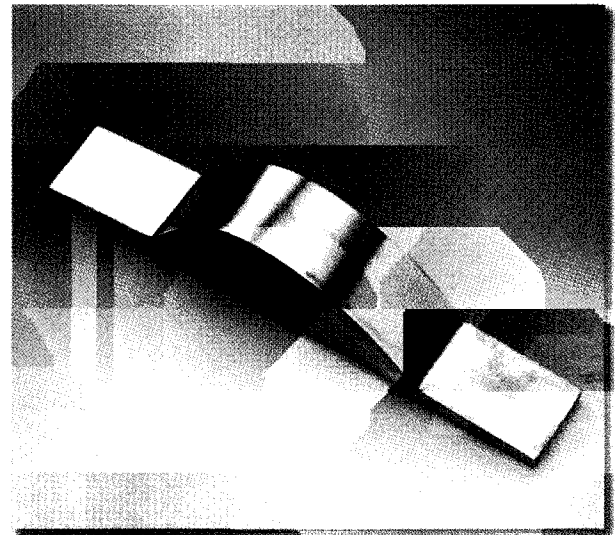

• Usual Shape

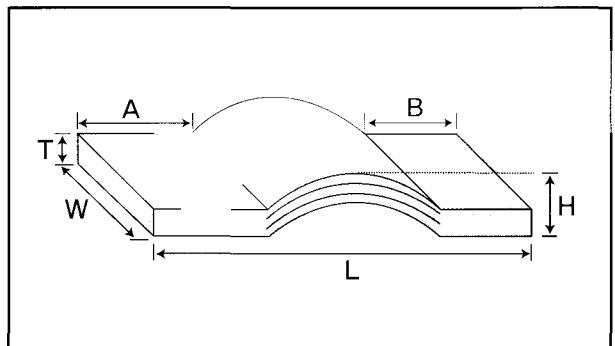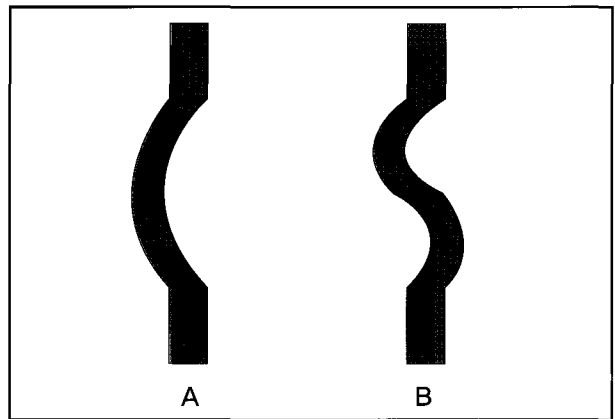

- Thickness of Laminate : 0.035 ~ 0.5mm
(0.0014 ~ 0.0197 inch)
- Products of other specification can be supplied with contract requirement