



# PREFABRICATED BRAIDS

## SPECIFICATIONS


- Electrolytic Tinned Copper
- Standard Diameter : 0.16mm

## APPLICATION


- Earthing for moving parts in panels and distribution boards.
- Equipotential bonding of all conductive materials, cable tray, etc.

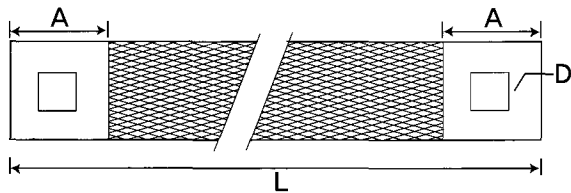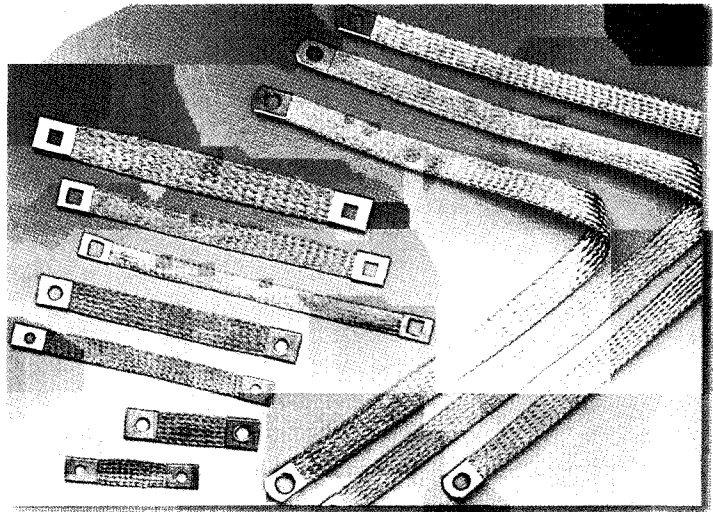

SECTION	SECTION		LENGTH (inch)	D (inch)	A (inch)
	mm <sup>2</sup>	in <sup>2</sup>			
14	0.0217		10	0.44×0.44	1
			12		
22	0.0341		10	0.44×0.44	1
			12		
38	0.0589		10	0.44×0.44	1.2
			12		

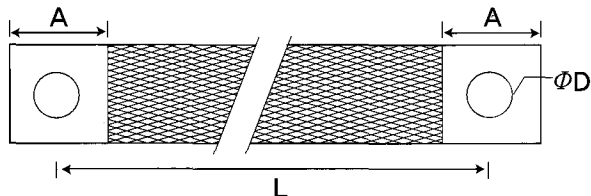

SECTION	SECTION		LENGTH (inch)	φD (inch)	A (inch)
	mm <sup>2</sup>	in <sup>2</sup>			
14	0.0217		4	3/8	1
			6		
22	0.0341		8	1/2	1
			10		
38	0.0589		12	9/16	1.2

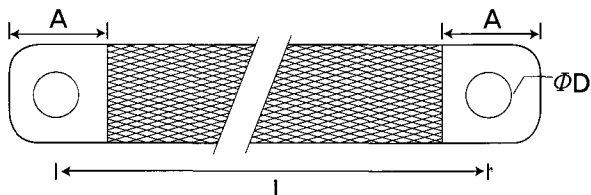

SECTION	SECTION		LENGTH (inch)	φD (inch)	A (inch)
	mm <sup>2</sup>	in <sup>2</sup>			
22	0.0341		12	5/16	1.1
			20	3/8	
			28	1/2	
38	0.0589		36	9/16	1.2
			40		

- Products of other specification can be supplied in accordance with contract requirement